

8A22NF-DEKA

SPECIFICATIONS

Nominal Voltage (V)	12V
Capacity at C/100	63Ah
Capacity at C/20	55Ah
Weight	37 lbs. (17 kg)
Plate Alloy	Lead Calcium
Posts	Forged Terminals & Bushings
Container/Cover	Polypropylene
Operating Temperature Range	-40°F (-40°C) - 140°F (60°C)



Vent	Self-sealing
Terminal	G (T881)



Rated non-spillable by ICAO, IATA and DOT

Made in the U.S.A. by East Penn Manufacturing Co., Inc.

Distributed by:

Valve-Regulated, Absorbed Glass Mat Technology




DIMENSIONS

Inches (mm)

Length	9.72 (247 mm) <i>including handle</i>
Width	5.47 (139 mm)
Height	9.24 (235 mm) <i>Including terminal</i>

AGM Cycle Life vs Depth of Discharge at +25°C (77°F)
Based on BCI 2-hour Capacity

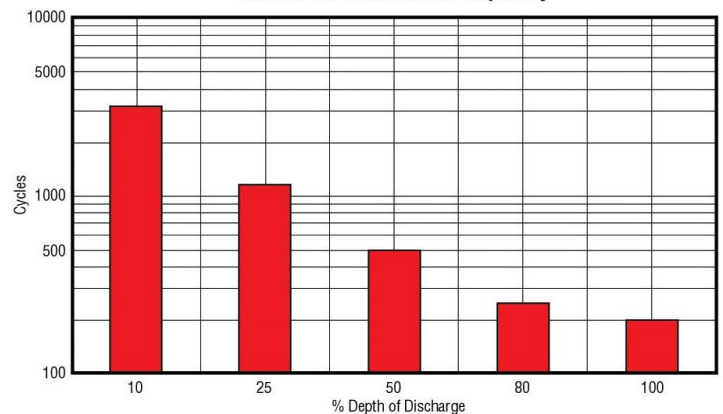

Solar Electric Supply, Inc.

Toll Free: 877-297-0014 • www.solarelectricsupply.com



**SOLAR
ELECTRIC
SUPPLY, INC.**