


# Mono <sup>™</sup>



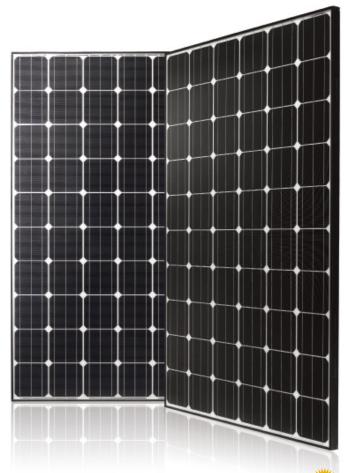

#### Light and Robust

With a weight of just 16.8 kg, LG modules are proven to demonstrate outstanding durability against external pressure up to 5400 Pa.



#### 100% EL Test Completed

All LG modules pass Electroluminescence inspection. This EL inspection detects cracks and other imperfections unseen by the naked eye.



#### **Reliable Warranties**

LG stands by its products with the strength of a global corporation and sterling warranty policies. LG offers a 10 year product limited warranty and a 25 year limited linear output warranty. LG Electronics, Inc. (Korea Exchange: 06657.KS) is one of the globally leading companies and technology innovator for electronics, information and communication products. The LG Electronics currently employs more than 91,000 people worldwide in 117 companies. In fiscal year 2011, 48.97 billion USD of revenue was achieved.

LG is one of the world's largest manufacturers of mobile phones, flat screen TVs, air conditioners, washing machines and refrigerators. As a futureoriented company, LG enables others to use technology consisting of renewable energies. LG's high quality solar products are being manufactured in LG's leading production facility in South Korea.





KM 564573 BS EN 61215 Photovoltaic Modules



#### **Convenient Installation**

LG modules are carefully designed to benefit installers by allowing quick and easy installations throughout the carrying, grounding, and connecting stages of modules.



### Extra Power

To minimize losses due to mismatch, LG produces 3 groups of solar modules which are sorted by its current class. This enables MonoX<sup>™</sup> to maximize the system's output by around 2% based off the theoretical calculation.



#### **Positive Power Tolerance**

LG provides rigorous quality testing to solar modules to assure customers of the stated power outputs of all modules, with a positive nominal tolerance starting at 0%.





#### Mechanical Properties

Cells	6 x 10	
Cell vendor	LG	
Cell type	Monocrystalline	
Cell dimensions	156 x 156 mm² / 6 x 6 in²	
# of busbar	3	
Dimensions (L x W x H)	1640 x 1000 x 35 mm	
	64.57 x 39.37 x 1.38 in	
Static snow load	5400 Pa / 113 psf	
Static wind load	2400 Pa / 50 psf	
Weight	16.8 ± 0.5 kg / 36.96 ± 1.1 lb	
Connector type	MC4 connector IP 67	
Junction box	IP 67 with 3 bypass diodes	
Length of cables	2 x 1000 mm / 2 x 39.37 in	
Frame	Anodized aluminum	

#### Certifications and Warranty


Certifications	IEC 61215, IEC 61730-1/-2, IEC 61701,
	DLG-Focus Test "Ammonia Resistance",
	UL 1703, ISO 9001
Product warranty	10 years
Output warranty of Pmax (measurement Tolerance ± 3%)	Linear warranty*

\* 1) 1st year: 97%, 2) After 2nd year: 0.7% annual degradation, 3) 80.2% for 25 years

#### Temperature Coefficients

NOCT	44.9 ± 2 °C
Pmpp	-0.459 %/K
Voc	-0.343 %/K
lsc	0.054 %/K

#### Characteristic Curves

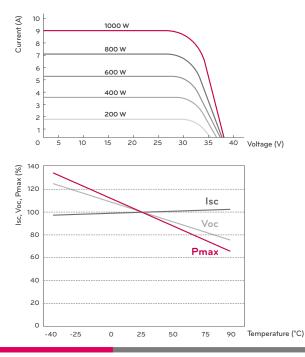

## Electrical Properties (STC\*)

	LG265S1C-G3
Maximum power at STC (Pmpp)	265
MPP voltage (Vmpp)	31.4
MPP current (Impp)	8.46
Open circuit voltage (Voc)	38.7
Short circuit current (Isc)	8.92
Module efficiency (%)	16.2
Operating temperature (°C)	
Maximum system voltage (V)	600 (UL), 1000 (IEC)
Maximum series fuse rating (A)	15
Power tolerance (%)	0 ~ +3

\* STC (Standard Test Condition): Irradiance 1000 W/m², module temperature 25 °C, AM 1.5

\* The nameplate power output is measured and determined by LG Electronics at its sole and absolute discretion.

#### Electrical Properties (NOCT\*)


Dimensions (mm/in)

	LG265S1C-G3
Maximum power (Pmpp)	195
MPP voltage (Vmpp)	28.4
MPP current (Impp)	6.84
Open circuit voltage (Voc)	35.8
Short circuit current (lsc)	7.21
Efficiency reduction (from 1000 W/m² to 200 W/m²)	< 4.5 %

\* NOCT (Nominal Operating Cell Temperature): Irradiance 800 W/m², ambient temperature 20 °C, wind speed 1 m/s

#### 5/1.38 28/1.10 22/0.87 1000/39.37 5.5\*4.0 (X view) Drain holes(4ea (Size of short side) 960/37.80 Long side frame Short side frame 4.0\*7.5 (Y view) (Distance between mounting holes) 18/0.71 8/0.71 48/1.89 unction box 12-Ø4.3 nding holes(12ea (-) (+) 8-Ø8.0(Z view) Mounting holes(8ea) 1000/39.37 Cable length 900/35.43 (Distance between mounting holes) 1100/43.31 (Distance between mounting holes) R1.5/0.06 Detail X 1640/64.57 (Size of long side) 0/0.1 Detail Y 944/37.17 370/14.57 Detail Z 270/10.63 35/1.38

\* The distance between the center of the mounting/grounding holes





Ø8/0.31

Copyright © 2013 LG Electronics. All rights reserved. 02/01/2013



North America Solar Business Team LG Electronics U.S.A. Inc 1000 Sylvan Ave, Englewood Cliffs, NJ 07632

Contact: lg.solar@lge.com www.lgsolarusa.com

10/0.40

10/0.40