


## VLS-20W Panels Specifications

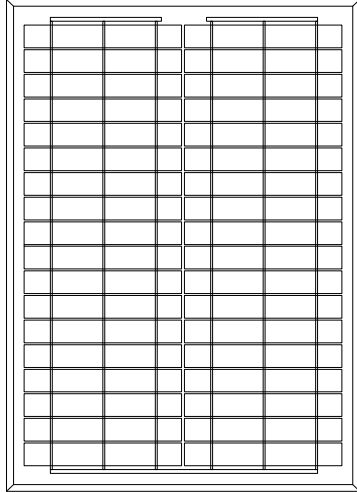

**Laminate:** Glass /EVA / TPT (tedlar/pet/tedlar) or TPE

**Front Side:** High-transmission 3.2mm tempered glass

**Back Side:** TPT /TPE

**Frame:** Clear anodized aluminum frame

**Output cable:** #18-2x15'

Module Type	Pm(Wp)±5%	Vmpp(V)	Impp(A)	Voc(V)	Isc(A)	Module size(mm)	NET(kg)
VLS-20W	20	17.1	1.17	21.4	1.3	520*350*35mm 20.5"*13.8"*1.38"	2.5

**Operation Temperature Range:** - 40°C ~ 85°C


**NOCT:** 48°C±3°C

**Temperature coefficients of Im:** + 0.1 %/°C

**Temperature coefficients of Vm:** - 0.38 %/°C

**Maximum System Voltage:** DC715V

**STC:** 1000W/m<sup>2</sup> , 25°C , AM1.5

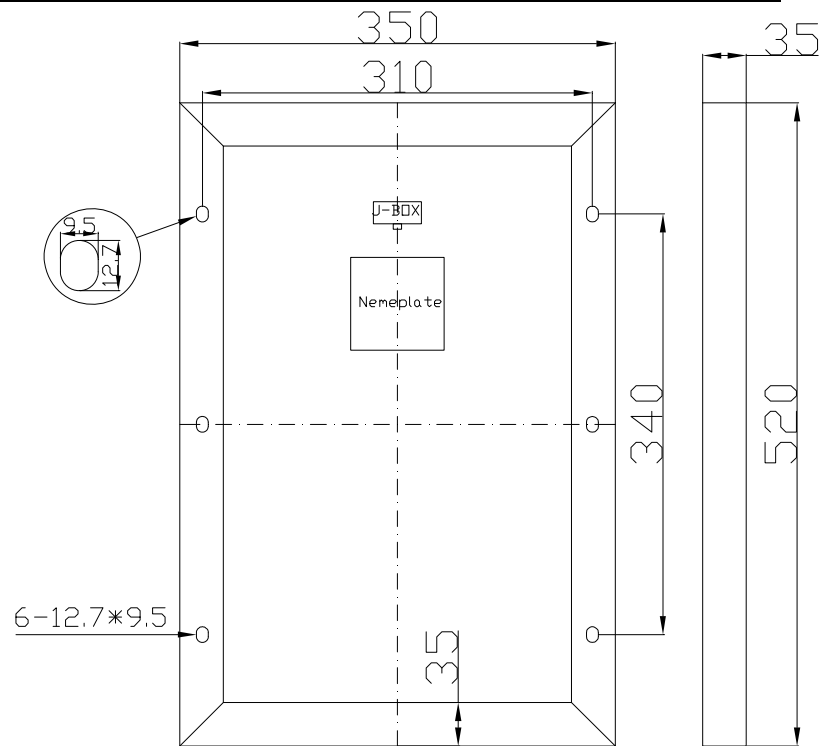

All the data of this sheet are subjected to change without notice.